

## 3" Hidrostral SuperHawk


Sewage & wastewater pump



### Specifications

<b>Inlet/Outlet connections</b>	3" / 75mm
<b>Frame</b>	Fully banded skid chassis
<b>Power</b>	Diesel
<b>Noise level</b>	53db(A)
<b>Max Output</b>	115m <sup>3</sup> /hr
<b>Max Dry Suction Lift</b>	8.5 metres
<b>Total Head</b>	25 metres
<b>Max solids</b>	60mm
<b>Fuel Tank capacity</b>	160 ltrs
<b>Fuel Consumption</b>	0.6 l/h at full load
<b>Dimensions (LxWxH) mm</b>	1167 x 1050 x 1300
<b>Wet Weight</b>	860 kg

### Performance Graph

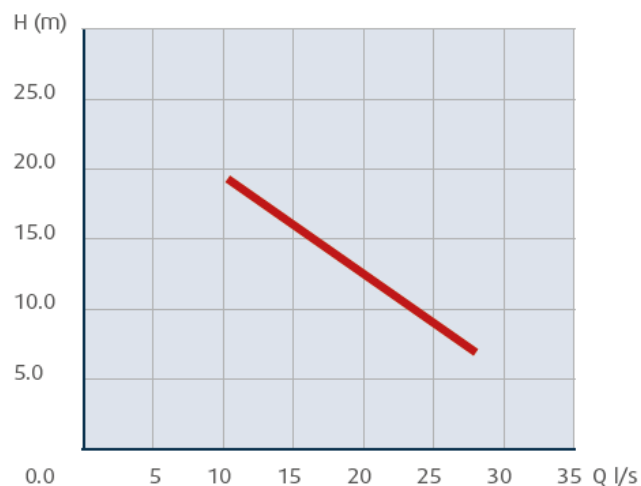

### Applications

- Dewatering & drainage
- Pumping bentonite & sludge
- Pumping out sewage pits & cellars
- Pumping out surface water
- In situations requiring suction & snoring

### Features

- Super silent canopy
- Environmental Base prevents spillages
- Capable of pumping viscous liquids
- Capable of pumping bentonite & sludge
- Can run for 265 hours on a full tank